
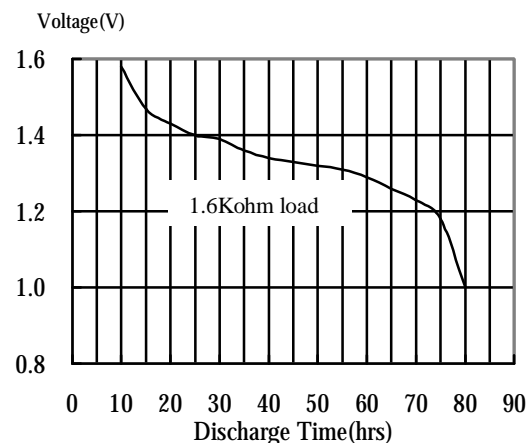


Type	: Mercury and Lead Free Button Cell
Chemical System	: Zinc/Manganese Dioxide
Nominal Voltage	: 1.5Volts
Nominal Dimensions	: Ø11.6mm×4.2mm
Application	: Calculator, hearing aid, lighter, electronic, toy, camera, ... etc.
Average Weight	: 1.4g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: 12 months shelf life after delivery .
Close Circuit Voltage	: 1.30 Volts (min.) (load resistor 300Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Lot Acceptance Test (to 1.0V at 22 ± 3 °C)	: 70mAh (at 1.6 kΩ load)
Service Output Test (to 1.2V at 22 ± 3 °C)	: 359Hr (at 10kΩ load)

Model No.: **GP186F**

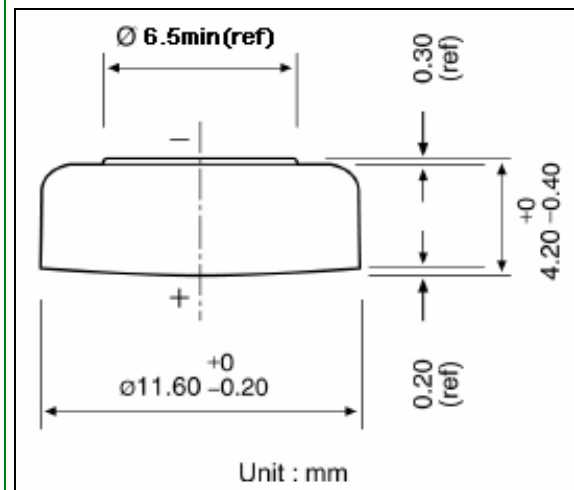

Typical Discharge characteristics at 20 ± 2 °C

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.