

Description : Mercury and Lead Free Button Cell
Chemical System : Zinc/Silver Oxide
Nominal Voltage : 1.55V
Nominal Dimension : $\Phi 5.80\text{mm} \times 2.15\text{mm}$
Applications : Analog watch
Average Weight : 0.25 g
Data Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.

Shelf Life : Not less than 90% of the service capacity within first year, storage at $20 \pm 2^\circ\text{C}$, $55 \pm 20\% \text{RH}$.
 Warranty 1 year

Close Circuit Voltage : 1.20 V(min.) (load resistor $2\text{K}\Omega$ at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)


Nominal Service Life (to 1.2V at $20 \pm 2^\circ\text{C}$) : 610hrs (at $68\text{k}\Omega$ load)
 185days (at $500\text{k}\Omega$ load)

Average Service Capacity (to 1.2V at $20 \pm 2^\circ\text{C}$) : 14mAh (at $68\text{k}\Omega$ load)

Cross References:
 IEC others


SR63 D379,379

Model No.: **GP379F**

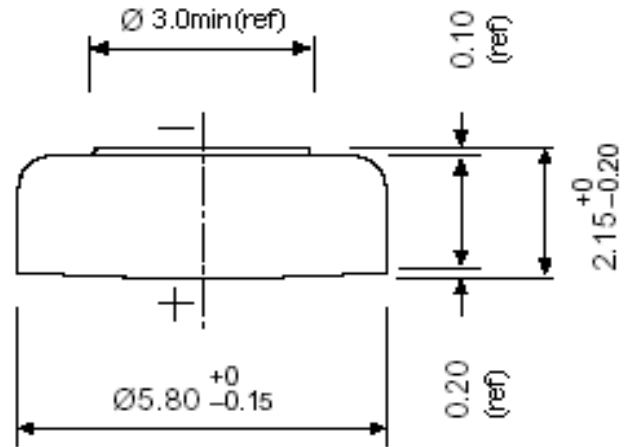

Unit : mm

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

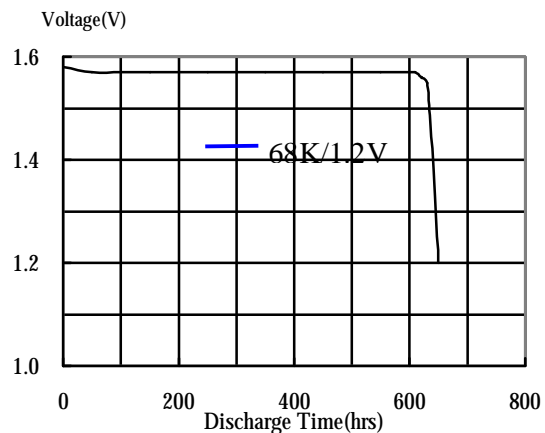

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.