

| | |
|------------------------------|--|
| Description | : Lithium Battery, 2/3A Size |
| Chemical System | : Lithium Manganese Dioxide |
| Nominal Voltage | : 3.0 Volts |
| Nominal Capacity | : 1400mAh (Discharge at 10mA to 2.0V at 23°C) |
| Typical Capacity | : 1450mAh (Discharge at 10mA to 2.0V at 23°C) |
| Dimensions | : Ø17 mm x 34.5 mm |
| Terminals | : Flat, Recessed Negative Terminal |
| Jacket | : PVC Resin Label |
| Average Weight | : App. 16g |
| Application | : Cameras, flashlights, memory back-up, medical equipment, meters (gas/electric/water), photo flash, electronic guns, etc. |
| Operating Temperature | : -40°C to 60°C |

Cross References:



Eveready

Duracell





EL 123AP

DL 123A

Model No.: **GPCR123A**



Unit : mm

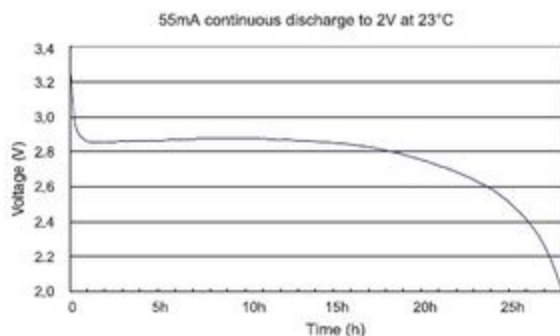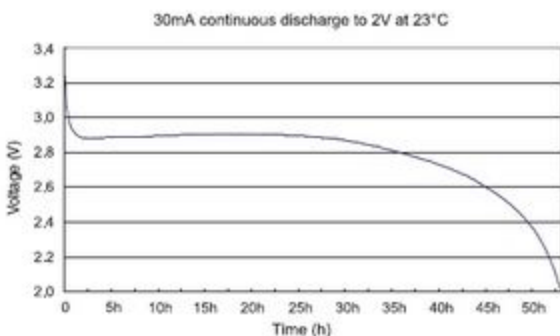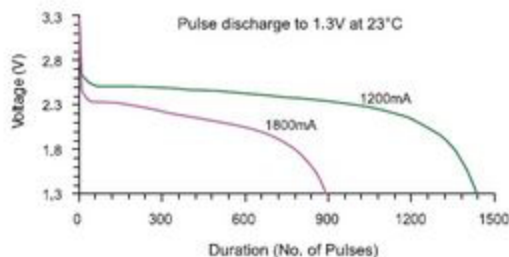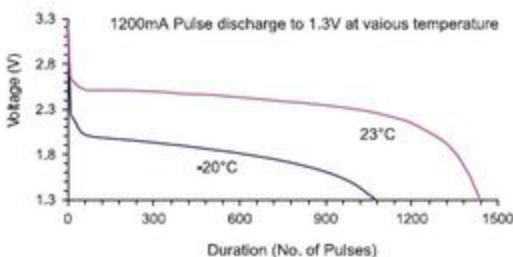

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.