



## Yuasa Technisches Datenblatt

### Yuasa YBX3008 - YBX3000 SMF Batterien

#### Leistung

|                               |      |
|-------------------------------|------|
| Spannung                      | 12V  |
| Kapazität 20 Std (vorgegeben) | 50Ah |
| Kaltstartstrom (A) EN1        | 400A |

#### Abmessungen

|        |       |
|--------|-------|
| Länge  | 202mm |
| Breite | 173mm |
| Höhe   | 225mm |



#### Maße und Gewichte

|  |        |
|--|--------|
| Durchschnittliches Gewicht inkl. Säure | 12.8kg |
|--|--------|

#### Gehäuseeigenschaften

|                     |                                      |
|---------------------|--------------------------------------|
| Gehäusotyp          | JIS D20                              |
| Batteriehälter      | N                                    |
| Ladezustandsanzeige | ✓                                    |
| Tragegriffe         | ✓                                    |
| Entgasung           | ✓                                    |
| Deckel Typ          | SMF doppelwandige Deckelkonstruktion |


#### Technologie

|                   |       |
|-------------------|-------|
| Flammschutz       | ✓     |
| Technologie       | Ca/Ca |
| Separator         | PE    |
| VDA Überroll Test | ✓     |
| Ladestrom         | 3A    |


#### Anschlusspol Typ

##### T1

Standard DIN Post

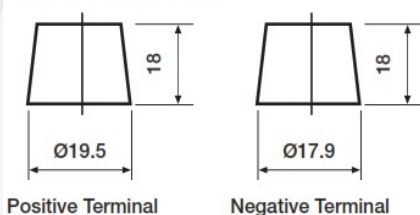

#### Zellenanordnung

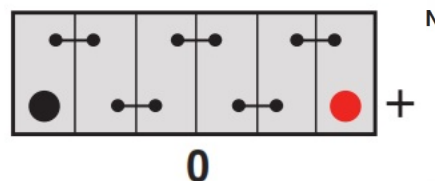

#### Batteriehälter



Ausstellungsdatum: 20/09/2019 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3008 - YBX3000 SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 50Ah |
| Cold Cranking Amps (EN1) | 400A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 202mm |
| Width  | 173mm |
| Height | 225mm |



#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 12.8kg |
|-----------------------|--------|

#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | JIS D20        |
| Hold Down                 | N              |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |


#### Technology

|                         |       |
|-------------------------|-------|
| Flame Arrestor          | ✓     |
| Technology              | Ca/Ca |
| Separator               | PE    |
| VDA Roll Over Test      | ✓     |
| Recommended Charge Rate | 3A    |

#### Terminal Type

##### T1


Standard DIN Post

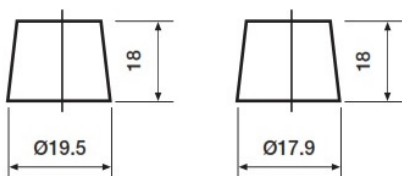

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

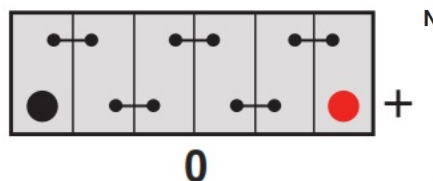

#### Battery Hold-down



Data Sheet generated on 20/09/2019 - E&OE