



## Yuasa Technisches Datenblatt

### Yuasa YBX3086 - YBX3000 SMF Batterien

#### Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	76Ah
Kaltstartstrom (A) EN1	680A

#### Abmessungen

Länge	278mm
Breite	175mm
Höhe	190mm

#### Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	19kg
--	------



#### Gehäuseeigenschaften


Gehäusotyp	L3 DIN
Zellendarstellung	1
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckel Typ	SMF doppelwandige Deckelkonstruktion

#### Technologie


Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Ladestrom	4A
Performance Marking	W3-C2-V2-E1

#### Anschlusspol Typ


**T1**  
Standard DIN Post

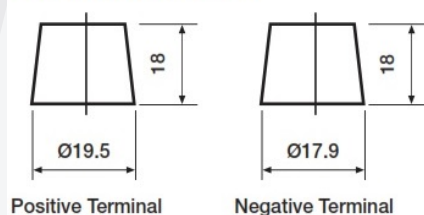

#### Zellenanordnung

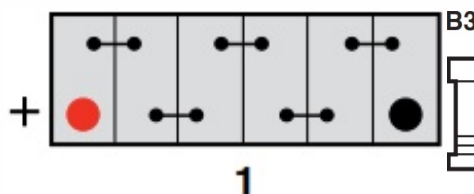

#### Batteriehälter

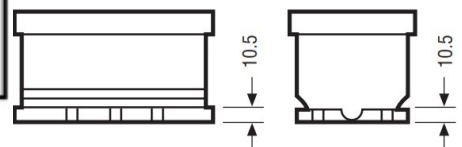

Ausstellungsdatum: 01/10/2019 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX3086 - YBX3000 SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	76Ah
Cold Cranking Amps (EN1)	680A

#### Dimensions

Length	278mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	19kg
-----------------------	------



#### Container Features

Case Type	L3 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1


#### Terminal Type

##### T1

Standard DIN Post




Positive Terminal




Negative Terminal

#### Cell Assembly Layout

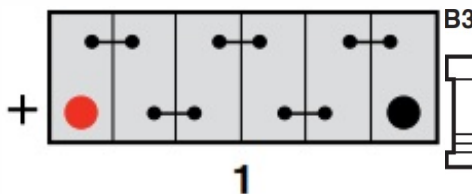

#### Battery Hold-down

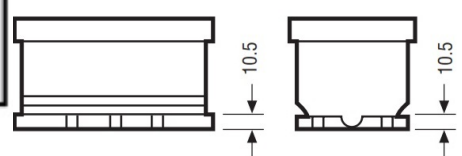

Data Sheet generated on 01/10/2019 - E&OE