



Yuasa Technisches Datenblatt

Yuasa YBX3100 - YBX3000 SMF Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	71Ah
Kaltstartstrom (A) EN1	680A

Abmessungen

Länge	278mm
Breite	175mm
Höhe	175mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	17.1kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	LB3 DIN
Batteriehälter	B3/B4
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckel Typ	SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Ladestrom	4A
Performance Marking	W3-C2-V2-E1


Anschlusspol Typ

T1

Standard DIN Post

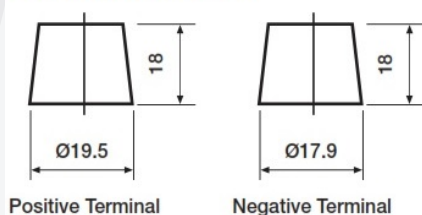


Zellenanordnung

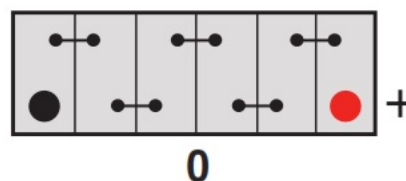

Batteriehälter

B3/B4 (B3 with Hold-Down adaptor)

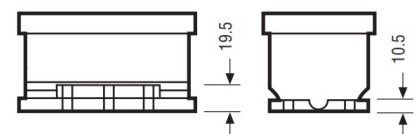

Ausstellungsdatum: 01/10/2019 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3100 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	71Ah
Cold Cranking Amps (EN1)	680A

Dimensions

Length	278mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	17.1kg
-----------------------	--------



Container Features

Case Type	LB3 DIN
Hold Down	B3/B4
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

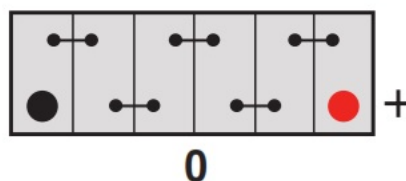

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

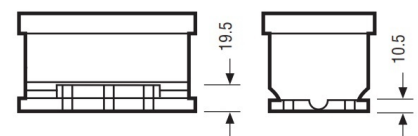

Data Sheet generated on 01/10/2019 - E&OE